

5

INSTALLATIO	N GUIDELINES

D

С

B

A

8

- 1) EXHAUST IS AIMED AWAY FROM OR PARALLEL TO THE STRUCTURE.
- 2) EXHAUST IS NOT DIRECTED AT PLAY AREAS, PATIOS OR OTHER AREAS WHERE PEOPLE CONGREGATE.
- 3) THE NEAREST WINDOW, VENT, DOOR OR SIMILAR STRUCTURE OPENING IS AT LEAST 5 FEET FROM THE EXHAUST END OF THE GENERATOR.
- 4) GENERATOR SET MUST BE INSTALLED A MINIMUM OF 18 INCHES FROM STRUCTURE PER NFPA 37, HOWEVER, ACTUAL DISTANCE MAY DIFFER BASED ON STATE AND LOCAL CODES.

6

5) WINDOWS & DOORS ON ADJACENT WALLS ARE CLOSED.


- 6) FURNACE AND OTHER SIMILAR INTAKES ARE AT LEAST 10 FEET FROM EXHAUST END OF GENERATOR.
- 7) 4" THICK CONCRETE PAD EXTENDING 6" BEYOND GENSET ON ALL SIDES.
- 8) NO PLANTS, SHRUBS OR OTHER COMBUSTIBLES ALLOWED IN CLEARANCE AREA. (MINIMUM 8 FT. FROM EXHAUST END).

9) SENSITIVE PLANTS, PATIO FURNITURE, ETC. ARE AT LEAST 8 FEET FROM EXHAUST END OF SET.

10) REFER TO OWNERS MANUAL FOR OTHER INSTALLATION CONSTRAINTS.

7

							UNLESS OTHERWISE SI ALL DIMENSIONS IN MI GENERAL TOLERANCE X.XX ± 0.25	LLIMETERS	DO NOT SCALE. THIS ASSEMBLY OR PART MUST		
	REV	DATE	CHANGE NUMBER		E DWGS, SEE PART NO. FOR REVISION LEVEL ART NUMBERS AFFECTED BY LATEST ISION	BY	X.X ± 1.0 SUI X ± 1.5 ANGLES ± 0°30'		COMPLY WITH PEP-RML-001. REFERENCE CAD MODEL FOR UNSPECIFIED DIMENSIONS.		EL FOR
-	-	22JAN2021	CT209473	NEW DRAW	/ING	RVM		JECTION			
-							MAJOR 0=		KOHLER, WISCONSIN 53044		
-							CRITICAL @=	0	SCALE: 0.150	SHEET SIZE: B	SHEET 2 OF 2
							CHARACTERISTICS CI KPS-8002			TITLE:	
-							DRAWN RVM BY	DATE:	DIMENSI	ON PRINT	, 24RCLA
IRCLA							APPROVED TAS	22JAN2021	DWG	NO.: ADV-97	758
		4		3		2			1		
		THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED						INTION ARE RESERVED.			

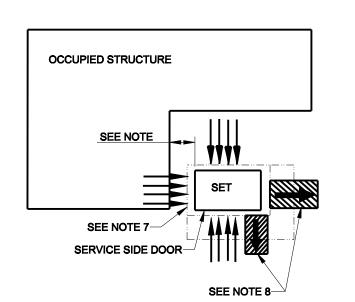

D

С

В